



Standard

STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	CFQ26W/G24D
Number of Lamps	2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	VH2Q26TPBLS
Suitable For Outdoor Use	Yes
Automatic Restart	Yes
Operating and Electrical	
Input Voltage	277 V
Input Frequency	60 Hz
Total Harmonic Distortion USA	25 %
Ignition Method	Preheat
Crestfactor (Nom)	1.5
Ignition Time (Nom)	1 s
Input Current (Open Circuit)	0
Input Current (Starting)	0.32
Ballast Factor (Nom)	0.87
Power Factor (Nom)	0.98
Input Current (Nom)	0.2 A
Input Power (Nom)	55 W


Rated Lamp Power	26 W
Wiring	
Wire Striplength	0.50/0.375 mm
Lamp Connection	Series
Wire Length by Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	30'
Max Ballast-Lamp Distance Tandem Wiring	Any = 30'
Max Ballast-Lamp Distance Through Wiring	Any = 30'
Mechanical and Housing	
Housing Material	Metal
Housing	R5
Housing Dimensions	9.5" x 2.38" x 1.69"
Approval and Application	
EMC Immunity Standard	FCC Non-Consumer

Standard

Approval Marks	CSA certificate UL certificate RoHS Compliant
Hum And Noise Level	A
UL Recognized	No
Product Data	
Order product name	STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V

EAN/UPC - Product	781087054000
Order code	913710339202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913710339202
Net Weight (Piece)	1.484 kg

Dimensional drawing

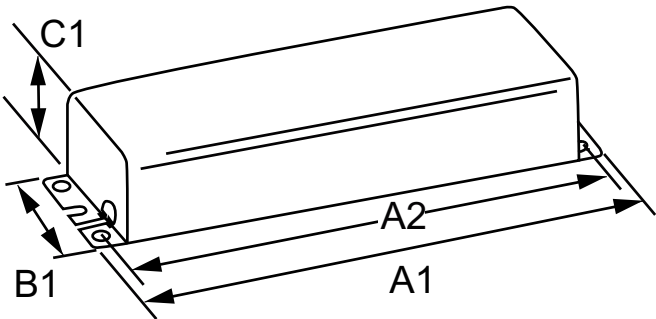

Product	A1	A2	B1	C1
STANDARD MAG BALLAST (2) 26W	9.5 in	8.91 in	2.38 in	1.69 in
COMPACT(2-PIN) 277V				

MAG BALLAST (2) 26W COMPACT(2-PIN) 277V

