



inserts:	page:
CD 40 poles + ⊕	57
CT, CTS (10A) *) 40 poles + ⊕	64
CDD 72 poles + ⊕	70
CDS 27 poles + ⊕	80
CSH 16 poles + ⊕	93
CNE, CSE 16 poles + ⊕	106
CCE 16 poles + ⊕	112
CSS 16 poles + ⊕	124
CT, CTSE (16A) *) .. 16 poles + ⊕	132
CQE 32 poles + ⊕	140
CQEE 40 poles + ⊕	146
CMCE, CMSH 6+2 (aux) poles + ⊕	150-151
CP 6 poles + ⊕	162
CX 6/36 and 12/2 poles + ⊕	170-171
CX 4/0 and 4/2 poles + ⊕	172
MIXO 4 modules	179-215

*) can be used only in bulkhead mounting housings

insert centre distance: 77,5 x 27 mm

bulkhead mounting housings with 2 levers or 4 pegs




bulkhead mounting housings with single lever



description	part No.	part No.
with one or two levers	CHI 16	CHI 16 L
with pegs ¹⁾	CHI 16 C	
with pegs and aluminum cover ¹⁾	CHI 16 CS	
with pegs and plastic cover ¹⁾	CHI 16 CP	
with lever and cover		CHI 16 LS

¹⁾ may be combined with enclosures:
 - CHO/CAO 16 X and CHV/CAV 16 X
 - MHO/MAO 16 X and MHV/MAV 16 X

panel cut-out for bulkhead mounting housings in mm

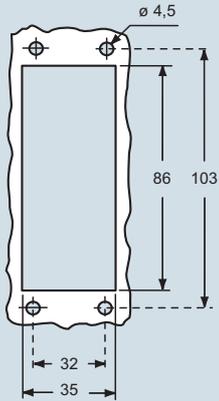

NB:
 The enclosures ensure IP66 protection (or IP65 for hinged cover versions) rating when mated and locked with the closing levers.
 The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.


CALUS® Type 4/4X/12
 (except enclosures with plastic cover)




dimensions shown are not binding and may be changed without notice

dimensions in mm


CHI

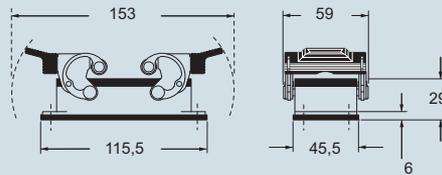

CHI C




CHI CS/CP

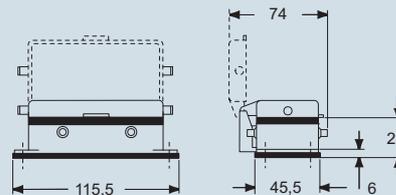


dimensions in mm

CHI L

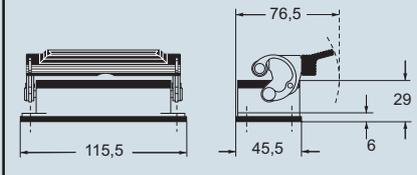

CHI LS

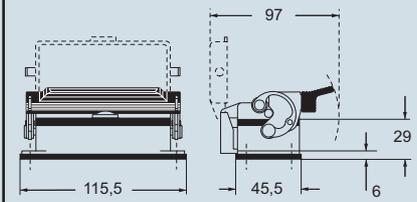

C-TYPE - size 77.27