


enclosures:
size "104.27" page:

C-TYPE IP65/IP66 258 - 266
C7 IP67, two levers 277
V-TYPE IP65/IP66, single lever 283/296 - 299
BIG hoods 316 - 319
T-TYPE IP65 insulating 332 - 333
T-TYPE / W IP66 insulating 342 - 343
HYGIENIC T-TYPE / H IP66/IP69 356 - 357
HYGIENIC T-TYPE / C IP66/IP69, -50 °C 364 - 365
W-TYPE for aggressive environments 376
EMC 395
central lever 410 - 412
IP68 432 - 435
LS-TYPE 456 - 457

panel supports: page:
COB 462 - 463

inserts,
screw terminal connections

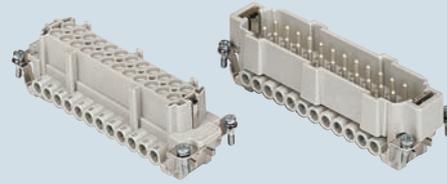


silver plated contacts

part No.

CNEF 24 T
CNEM 24 T

CNEF 24 TX
CNEM 24 TX

inserts,
spring terminal connections

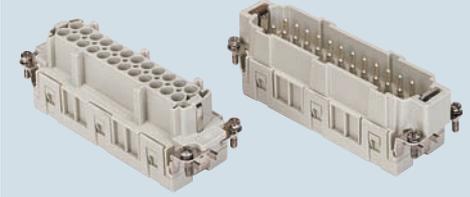

silver plated contacts


part No.

CSEF 24
CSEM 24


description	part No.
indirect, with plate 1) female inserts with female contacts male inserts with male contacts	CNEF 24 T CNEM 24 T
direct, without plate 2) female inserts with female contacts male inserts with male contacts	CNEF 24 TX CNEM 24 TX
spring terminal female inserts with female contacts male inserts with male contacts	CSEF 24 CSEM 24

- characteristics according to EN 61984:
16A 500V 6kV 3
16A 400/690V 6kV 2
- cUL - UL for USA and Canada (CNE), UL (CSE), CSA, CCC *, GL, EAC certified
- * CQC certification being applied for
- rated voltage according to UL/CSA: 600V
- insulation resistance: $\geq 10 \text{ G}\Omega$
- ambient temperature limit: $-40 \text{ }^\circ\text{C} \dots +125 \text{ }^\circ\text{C}$
- are made of self-extinguishing thermoplastic resin UL 94 V0
- mechanical life: ≥ 500 cycles
- contact resistance: $\leq 1 \text{ m}\Omega$ (CNE) - $\leq 3 \text{ m}\Omega$ (CSE)
- for maximum current load, see the following load curves inserts, for more information see page 559


dimensions in mm

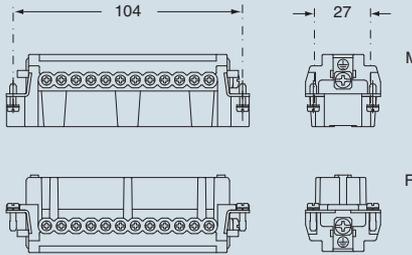


contacts side (front view)




- inserts with plate for section conductors:
0,5 - 4 mm² - AWG 20 - 12
- inserts without plate for section conductors:
0,25 - 2,5 mm² - AWG 24 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0,5 Nm (4.4 lb.in), for more information see page 34 and 35

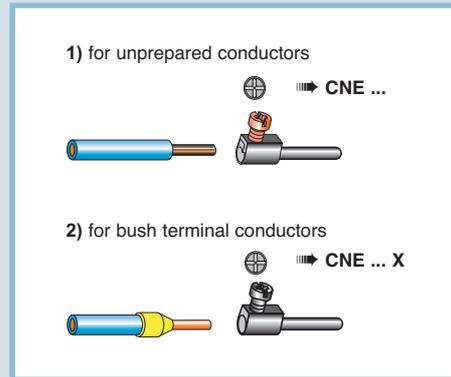




dimensions in mm

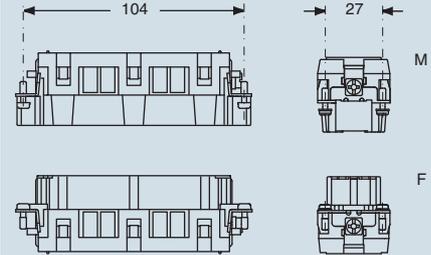

contacts side (front view)



- inserts for section conductors:
0,14 - 2,5 mm² - AWG 26 - 14
- conductors stripping length: 9...11 mm

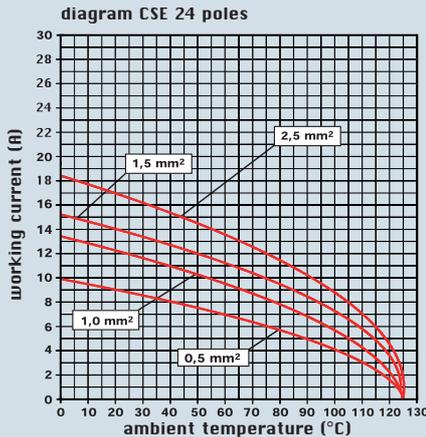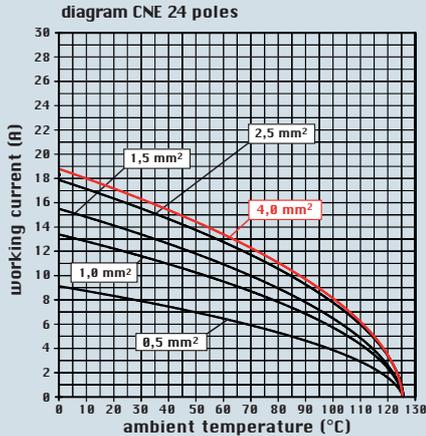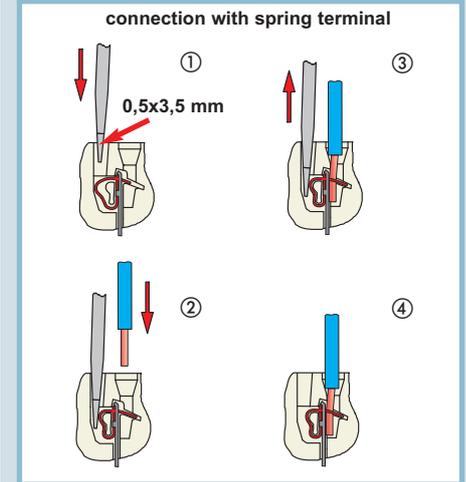

dimensions shown are not binding and may be changed without notice