


Conduit and Cable Supports

Cable Snap Clip

- Supports cable from 1/16"–1/2" flange
- Works with MC and AC cable dimensions .178" to 1.250"
- Snaps easily onto flange
- Cable snaps right into fastener
- No load rating — for positioning only
- Installs easily with a hammer

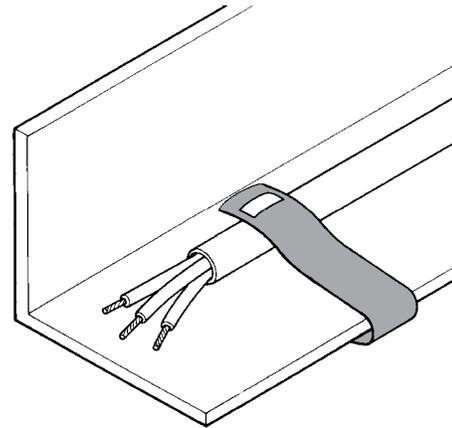

CAT. NO.	FIG. NO.	CABLE O.D. (IN.)	FLANGE THICKNESS (IN.)	STD. CTN.
SSF-CES218	1	.178-.218	1/16-3/16	100
SSF-CES281	1	.218-.276	1/16-3/16	100
SSF-CES375	1	.312-.375	1/16-3/16	100
SSF-CES437	1	.375-.437	1/16-3/16	100
SSF-CES562	1	.468-.562	1/16-3/16	100
SSF-CES718	1	.600-.718	1/16-3/16	100
SSF-CES937	1	.750-.937	1/16-3/16	100
SSF-CES1250	1	.968-1.250	1/16-3/16	100
SSF-CEM218	1	.178-.218	3/16-9/32	100
SSF-CEM281	1	.218-.276	3/16-9/32	100
SSF-CEM375	1	.312-.375	3/16-9/32	100
SSF-CEM437	1	.375-.437	3/16-9/32	100
SSF-CEM562	1	.468-.562	3/16-9/32	100
SSF-CEM718	1	.600-.718	3/16-9/32	100
SSF-CEM937	1	.750-.937	3/16-9/32	100
SSF-CEM1250	1	.968-1.250	3/16-9/32	100
SSF-CEL218	1	.178-.218	5/16-1/2	100
SSF-CEL281	1	.218-.276	5/16-1/2	100
SSF-CEL375	1	.312-.375	5/16-1/2	100
SSF-CEL437	1	.375-.437	5/16-1/2	100
SSF-CEL562	1	.468-.562	5/16-1/2	100
SSF-CEL718	1	.600-.718	5/16-1/2	100
SSF-CEL937	1	.750-.937	5/16-1/2	100
SSF-CEL1250	1	.968-1.250	5/16-1/2	100
SSF-CF1/8	2	.200-.468	1/8-1/4	100
SSF-CF3/8	2	.276-.600	3/16-7/16	100
SSF-CAXL1	3	Snap clip adapter	1/2-5/8	100
SSF-CAXL2	3	Snap clip adapter	3/8-3/4	100




Fig. 1



Fig. 2




Fig. 3

Flexible Conduit to Metal Stud

- Provides quick attachment for MC or AC to metal stud
- No load rating — for positioning only
- No tools required

CAT. NO.	FIG. NO.	DESCRIPTION	STD. CTN.
SSF-CM535	1	MC/AC cable to metal stud clip, 14-2 through 12-3 cable (.433"–.535" O.D.)	100



Fig. 1