


## Conduit and Cable


Pages 17-36



Page 18




Page 19



Page 20



Page 20




Page 21



Page 21



Page 22



Page 22



Page 22




Page 23




Page 24



Page 24



Page 25



Page 26



Page 26




Page 26




Page 27



Page 28



Page 29



Page 29



Page 30




Page 30



Page 30



Page 30



Page 30



Page 30



Page 30




Page 31



Page 31



Page 31



Page 31



Page 31



Page 31



Page 32




Page 32




Page 33



Page 33



Page 34



Page 34



Page 35




Page 35



Page 35

# Steel City® Spring Steel Fasteners

## Conduit Supports



**No tools needed!  
Finger friendly  
design!**

### Features

- Available for 3/8" through 2" trade sizes for EMT, flexible conduit and MC/AC cable.
- Available with either a plain hole for 1/4" bolt or a 1/4"-20 thread impression.
- Shape of clip and clasp mechanism allows for hand installation (no tools needed).
- Unique clasp design has an aggressively angled tab and receiving hole to provide consistent, easy clasping of the clip.
- Supports 100 lbs. static load limit in the vertical position. Supports 25 lbs. static load limit in the horizontal position.
- Unique finger grips on the ends of the clip provide easy grip for hand installation, or easy grip of pliers when using pliers to install.

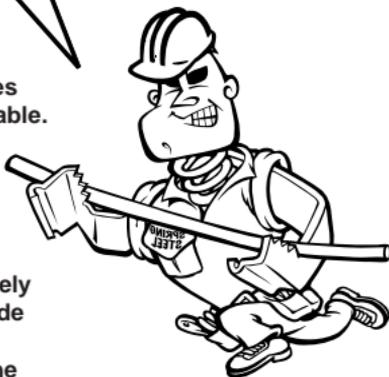


Fig. 1

### Conduit Clips

Catalog Number	Fig. No.	Conduit Size	Mounting Hole	Pkg. Per Box
SSF-CC3/8	1	14-2 thru 12-3 MC/AC Cable and 3/8" Conduits	9/32" Plain	100
SSF-CC1/2 3/4	1	1/2" -3/4"	9/32" Plain	100
SSF-CC1	1	1"	9/32" Plain	100
SSF-CC1 1/4	1	1-1/4"	9/32" Plain	100
SSF-CC1 1/2	1	1-1/2"	9/32" Plain	100
SSF-CC2	1	2"	9/32" Plain	100
SSF-CC3/8T	1	14-2 thru 12-3 MC/AC Cable and 3/8" Conduits	1/4"-20 Thread Impression	100
SSF-CC1/2 3/4T	1	1/2" -3/4"	1/4"-20 Thread Impression	100
SSF-CC1T	1	1"	1/4"-20 Thread Impression	100
SSF-CC1 1/4T	1	1-1/4"	1/4"-20 Thread Impression	100
SSF-CC1 1/2T	1	1-1/2"	1/4"-20 Thread Impression	100
SSF-CC2T	1	2"	1/4"-20 Thread Impression	100

Listed UL 2239



# Steel City® Spring Steel Fasteners

## Conduit Supports

### Features

- Available for 1/2" through 1" EMT and rigid conduit.
- Available with either a plain hole for 1/4" bolt or a 1/4"-20 thread impression.
- Supports ultimate static load limit 25 pounds in the vertical position. Supports ultimate static load limit 15 pounds in the horizontal position.






Fig. 1

### Conduit Clips

Catalog Number	Fig. No.	Conduit Size	Mounting Hole	Pkg. Per Box
SSF-CS1/2	1	1/2"	9/32" Plain	100
SSF-CS3/4	1	3/4"	9/32" Plain	100
SSF-CS1	1	1"	9/32" Plain	100
SSF-CS1/2T	1	1/2"	1/4"-20 Thread impression	100
SSF-CS3/4T	1	3/4"	1/4"-20 Thread impression	100
SSF-CS1T	1	1"	1/4"-20 Thread impression	100

# Steel City® Spring Steel Fasteners

## Conduit Supports



### Features

- Available with Spring Steel Conduit Clip bottom mounted or side mounted.
- Available for 3/8" through 2" trade sizes for EMT, rigid, flexible conduit and MC/AC cable.
- Fits beam flanges 1/8" through 3/4" thick.
- Will pivot through 360°.
- Fig. 1 supports 75 lbs. static load limit.
- Fig. 2 supports 25 lbs. static load limit.
- Installs easily with a hammer and pliers.




Fig. 1




Fig. 2

## Flange Mount Conduit Clips

Conduit & Cable

Catalog Number	Fig. No 1	Catalog Number	Fig. No 2	Description	Pkg./Box
SSF-CC3/8-H1/4		SSF-CC3/8-F1/4		14-2 thru 12-3 MC/AC cable and 3/8" conduits to 1/8" to 1/4" flanges	25
SSF-CC1/2 3/4-H1/4		SSF-CC1/2 3/4-F1/4		1/2" conduit to 3/4" conduit to 1/8" to 1/4" flanges	25
SSF-CC1-H1/4		SSF-CC1-F1/4		1" conduit to 1/8" to 1/4" flanges	25
SSF-CC1 1/4-H1/4		SSF-CC1 1/4-F1/4		1-14" conduit to 1/8" to 1/4" flanges	25
SSF-CC1 1/2-H1/4		SSF-CC1 1/2-F1/4		1-12" conduit to 1/8" to 1/4" flanges	25
SSF-CC2-H1/4		SSF-CC2-F1/4		2" conduit to 1/8" to 1/4" flanges	25
SSF-CC3/8-H1/2		SSF-CC3/8-F1/2		14-2 thru 12-3 MC/AC cable and 3/8" conduits to 5/16" to 1/2" flanges	25
SSF-CC1/2 3/4-H1/2		SSF-CC1/2 3/4-F1/2		1/2" conduit to 3/4" conduit to 5/16" to 1/2" flanges	25
SSF-CC1-H1/2		SSF-CC1-F1/2		1" conduit to 5/16" to 1/2" flanges	25
SSF-CC1 1/4-H1/2		SSF-CC1 1/4-F1/2		1-14" conduit to 5/16" to 1/2" flanges	25
SSF-CC1 1/2-H1/2		SSF-CC1 1/2-F1/2		1-12" conduit to 5/16" to 1/2" flanges	25
SSF-CC2-H1/2		SSF-CC2-F1/2		2" conduit to 5/16" to 1/2" flanges	25
SSF-CC3/8-H3/4		SSF-CC3/8-F3/4		4-2 thru 12-3 MC/AC cable and 3/8" conduits to 9/16" to 3/4" flanges	25
SSF-CC1/2 3/4-H3/4		SSF-CC1/2 3/4-F3/4		1/2" conduit to 3/4" conduit to 9/16" to 3/4" flanges	25
SSF-CC1-H3/4		SSF-CC1-F3/4		1" conduit to 9/16" to 3/4" flanges	25
SSF-CC1 1/4-H3/4		SSF-CC1 1/4-F3/4		1-1/4" conduit to 9/16" to 3/4" flanges	25
SSF-CC1 1/2-H3/4		SSF-CC1 1/2-F3/4		1-1/2" conduit to 9/16" to 3/4" flanges	25
SSF-CC2-H3/4		SSF-CC2-F3/4		2" conduit to 9/16" to 3/4" flanges	25

Listed UL 2239



Thomas & Betts

# Steel City® Spring Steel Fasteners

## Conduit Supports

### Features

- Available with Spring Steel Conduit Clip bottom mounted or side mounted.
- Available for 1/2" through 1" EMT and rigid conduit.
- Fits beam flanges 1/8" through 3/4" thick.
- Will pivot 360°.
- Fig. 1 supports 25 lbs. static load limit.
- Fig. 2 supports 15 lbs. static load limit.
- Requires only hammer to install.





Fig. 1




Fig. 2


### Flange Mount Snap-in Conduit Clip

Catalog Number	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CS1/2-H1/4	1	1/2" conduit to 1/8" to 1/4" flanges	25	25
SSF-CS3/4-H1/4	1	3/4" conduit to 1/8" to 1/4" flanges	25	25
SSF-CS1-H1/4	1	1" conduit to 1/8" to 1/4" flanges	25	25
SSF-CS1/2-H1/2	1	1/2" conduit to 5/16" to 1/2" flanges	25	25
SSF-CS3/4-H1/2	1	3/4" conduit to 5/16" to 1/2" flanges	25	25
SSF-CS1-H1/2	1	1" conduit to 5/16" to 1/2" flanges	25	25
SSF-CS1/2-H3/4	1	1/2" conduit to 9/16" to 3/4" flanges	25	25
SSF-CS3/4-H3/4	1	3/4" conduit to 9/16" to 3/4" flanges	25	25
SSF-CS1-H3/4	1	1" conduit to 9/16" to 3/4" flanges	25	25
SSF-CS1/2-F1/4	2	1/2" conduit to 1/8" to 1/4" flanges	15	25
SSF-CS3/4-F1/4	2	3/4" conduit to 1/8" to 1/4" flanges	15	25
SSF-CS1-F1/4	2	1" conduit to 1/8" to 1/4" flanges	15	25
SSF-CS1/2-F1/2	2	1/2" conduit to 5/16" to 1/2" flanges	15	25
SSF-CS3/4-F1/2	2	3/4" conduit to 5/16" to 1/2" flanges	15	25
SSF-CS1-F1/2	2	1" conduit to 5/16" to 1/2" flanges	15	25
SSF-CS1/2-F3/4	2	1/2" conduit to 9/16" to 3/4" flanges	15	25
SSF-CS3/4-F3/4	2	3/4" conduit to 5/16" to 3/4" flanges	15	25
SSF-CS1-F3/4	2	1" conduit to 5/16" to 3/4" flanges	15	25

Conduit & Cable

# Steel City® Spring Steel Fasteners

## Conduit Supports



### Features

#### FROM DROP WIRE OR FLANGE

- Attaches to #12 wire through 3/8" rod.
- Fits 1/8" to 3/8" flanges.
- Provides attachment of conduit and boxes.
- Supports #10-24 and 1/4"-20 threaded bridge rings.
- Assembles to support 1/2", 3/4" and 1" EMT and rigid conduit.
- Also attaches to 1/4" and 3/8" threaded rod.



Fig. 1




Fig. 2




Fig. 3


## Multi-Function Utility Clip from Drop Wire or Flange

Catalog Number	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CUC	1	Multi-function utility clip	50	100
SSF-CUC-S1/2	2	Utility clip to 1/2" conduit	15	25
SSF-CUC-S3/4	2	Utility clip to 3/4" conduit	15	25
SSF-CUC-S1	2	Utility clip to 1" conduit	15	25
SSF-CUC-C1/2 3/4	3	Utility clip to 1/2" or 3/4" conduit	25	25
SSF-CUC-C1	3	Utility clip to 1" conduit	25	25

# Steel City® Spring Steel Fasteners

## Conduit/Cable

**New finger friendly design and exclusive center slot keeps drop wire centered.**



### Features

- Exclusive slot keeps drop wire centered.
- Will not bend or deform drop wire.
- Delivers faster installation.
- Supports MC/AC, 14-2 through 12-3 cable and 1/2" EMT (.433"-.706" O.D.) from #8-#12 wire and 1/4" plain and threaded rod.
- Eliminates the need to trap cable against drop wire.
- Supports 25 lbs. static load limit.
- No tools required.



Fig. 1




### Cable from Drop Wire Support

Catalog Number	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CB706	1	Cable from drop wire support	25	100

Conduit & Cable

# Steel City® Spring Steel Fasteners

## Conduit/Cable



### Features

- CK Series attaches conduit (EMT, Rigid, ENT® and Aluminum) to drop wire, rods or flanges.
- Application "A" (vertical flange), supports 25 lbs. static load limit.
- Application "B" (horizontal flange), supports 100 lbs. static load limit.
- Application "C" (vertical drop wire), supports 50 lbs. static load limit.



FIG. 1



FIG. 2

## Conduit Hangers from Flange, Wire or Rod

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CK1/2	1	Conduit hangers for flange wire or rod	100
SSF-CK3/4	1	Conduit hangers for flange wire or rod	100
SSF-CK1	2	Conduit hangers for flange wire or rod	100

## Wire/Rod

Conduit Size	#10 & #12 Wire	#8 & #9 Wire	3/16" Plain Rod	1/4" Plain & Threaded Rod	3/8" Plain & Threaded Rod
1/2 EMT	CK1/2	CK1/2	CK1/2	CK1/2	CK3/4
1/2 Rigid	CK1/2	CK1/2	CK1/2	CK3/4	CK3/4
3/4 EMT	CK3/4	CK3/4	CK3/4	CK3/4	CK1
3/4 Rigid	CK3/4	CK3/4	CK3/4	CK1	CK1
1 EMT	—	CK1	CK1	CK1	CK1
1 Rigid	—	CK1	CK1	CK1	—

## Flange

Conduit Size	1/8" Flange	3/16" - 1/4" Flange	5/16" - 3/8" Flange	7/16" - 1/2" Flange
1/2 EMT	CK1/2	CK1/2	CK3/4	CK3/4
1/2 Rigid	CK1/2	CK3/4	CK3/4	CK1
3/4 EMT	CK3/4	CK3/4	CK1	CK1
3/4 Rigid	CK3/4	CK1	CK1	CK1
1 EMT	CK1	CK1	CK1	CK1
1 Rigid	CK1	CK1	—	—

Listed UL 2239



### Features

#### FROM DROP WIRE

- One piece construction.
- Can be used in vertical or horizontal (.433-.535 outer diameter)
- No load rating for positioning only.
- No installation tools required.






Fig. 1

## Flexible Conduit Hangers from Drop Wire

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CK535	1	Flexible conduit hanger from drop wire, #8-#12 wire, .433-.535 O.D. cable	100

# Steel City® Spring Steel Fasteners

## Conduit/Cable

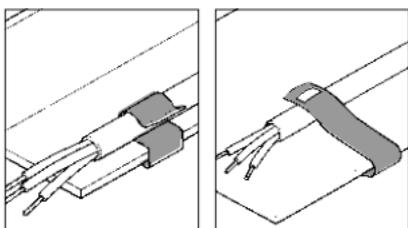

### Features

- Supports cable from 1/16"-1/2" flange.
- Works with MC and AC cable dimensions .178 to 1.250.
- Snaps easily onto flange.
- Cable snaps right into fastener.
- No load rating. For positioning only.
- Installs easily with a hammer.




Fig. 1



Fig. 2



Fig. 3

## Cable Snap Clip

Catalog Number	Fig. No.	Cable O.D.	Flange Thickness	Pkg. Per Box
SSF-CES218	1	.178"-.218"	1/16" - 3/16"	100
SSF-CES281	1	.218"-.276"	1/16" - 3/16"	100
SSF-CES375	1	.312"-.375"	1/16" - 3/16"	100
SSF-CES437	1	.375"-.437"	1/16" - 3/16"	100
SSF-CES562	1	.468"-.562"	1/16" - 3/16"	100
SSF-CES718	1	.600"-.718"	1/16" - 3/16"	100
SSF-CES937	1	.750"-.937"	1/16" - 3/16"	100
SSF-CES1250	1	.968"-.1.250"	1/16" - 3/16"	100
SSF-CEM218	1	.178"-.218"	3/16" - 9/32"	100
SSF-CEM281	1	.218"-.276"	3/16" - 9/32"	100
SSF-CEM375	1	.312"-.375"	3/16" - 9/32"	100
SSF-CEM437	1	.375"-.437"	3/16" - 9/32"	100
SSF-CEM562	1	.468"-.562"	3/16" - 9/32"	100
SSF-CEM718	1	.600"-.718"	3/16" - 9/32"	100
SSF-CEM937	1	.750"-.937"	3/16" - 9/32"	100
SSF-CEM1250	1	.968"-.1.250"	3/16" - 9/32"	100
SSF-CEL218	1	.178"-.218"	5/16" - 1/2"	100
SSF-CEL281	1	.218"-.276"	5/16" - 1/2"	100
SSF-CEL375	1	.312"-.375"	5/16" - 1/2"	100
SSF-CEL437	1	.375"-.437"	5/16" - 1/2"	100
SSF-CEL562	1	.468"-.562"	5/16" - 1/2"	100
SSF-CEL718	1	.600"-.718"	5/16" - 1/2"	100
SSF-CEL937	1	.750"-.937"	5/16" - 1/2"	100
SSF-CEL1250	1	.968"-.1.250"	5/16" - 1/2"	100
SSF-CF1/8	2	.200"-.468"	1/8" - 1/4"	100
SSF-CF3/8	2	.276"-.600"	5/16" - 7/16"	100
SSF-CAXL1	3	Snap clip adapter	1/2" - 5/8"	100
SSF-CAXL2	3	Snap clip adapter	5/8" - 3/4"	100

### Features

- Provides quick attachment for MC or AC cable to metal stud.
- No load rating. For positioning only.
- No tools required.






Fig. 1

## Flexible Conduit to Metal Stud

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CM535	1	MC/AC cable to metal stud clip, 14-2 thru 12-3 cable (.433"-535" O.D.)	100

# Steel City® Spring Steel Fasteners

## Conduit/Cable



### Features

- Effectively supports 3 runs (CW3) or 6 runs (CW6) of MC/AC cable. Also can be used to support all types of low voltage cabling as a bridle ring would.
- Locking hook contains cables inside the loop.



Fig. 1

## Flexible Conduit and Cable Hanger

Catalog Number	Fig. No.	No. of Runs of MC/AC Cable	Inner Diameter	Ultimate Static Load Limit	Qty. Per Box
SSF-CW3	1	3	1-1/8"	20	100
SSF-CW6	1	6	1-3/4"	50	100

### Features

- Back-to-back conduit clips for individual use or use as lightweight trapeze.
- Available for 3/8" through 2" sizes for EMT, rigid, flexible conduit and MC/AC cable.
- For use as lightweight trapeze. Total load limit is 100 lbs.
- Clips for vertical use, static load limit 100 lbs.
- No screws or bolts.






Fig. 3

Fig. 4

### Lightweight Trapeze

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CC1-C3/8	3	Back-to-back conduit clips, 14-2 thru 12-3 MC/AC to 1" conduit	25
SSF-CC1-C1/2 3/4	3	Back-to-back conduit clips, 1/2" or 3/4" conduit to 1" conduit	25
SSF-CC1-C1	3	Back-to-back conduit clips 1" conduit to 1" conduit	25
SSF-CC1-C1 1/4	3	Back-to-back conduit clips 1-1/4" conduit to 1" conduit	25
SSF-CC1-C1 1/2	3	Back-to-back conduit clips 1-1/2" conduit to 1" conduit	25
SSF-CC1-C2	3	Back-to-back conduit clips 2" conduit to 1" conduit	25
SSF-CC1/2 3/4-C1/2 3/4*	3	Back-to-back conduit clips 1/2" or 3/4" conduit	25

### Conduit To Conduit Clips

Catalog Number	Fig. No.	Description	Static Load Limit	Pkg. Per Box
SSF-CS1/2-S1/2*	4	Back-to-back snap-in conduit clip, 1/2" to 1/2" EMT or rigid	25	25
SSF-CS1/2-S3/4*	4	Back-to-back snap-in conduit clip, 1/2" to 3/4" EMT or rigid	25	25
SSF-CS1/2-S1*	4	Back-to-back snap-in conduit clip, 1/2" to 1" EMT or rigid	25	25
SSF-CS3/4-S3/4*	4	Back-to-back snap-in conduit clip, 3/4" to 3/4" EMT or rigid	25	25
SSF-CS3/4-S1*	4	Back-to-back snap-in conduit clip, 3/4" to 1" EMT or rigid	25	25
SSF-CS1-S1*	4	Back-to-back snap-in conduit clip, 1" to 1" EMT or rigid	25	25


Listed UL 2239

\* UL and cUL not applicable



# Steel City® Spring Steel Fasteners

## Conduit/Cable



### Features

- Clips available for 1, 2, or 4 cable runs.
- The standard CR2 part can be broken apart to create 2 single cable run clips.
- Mounting holes available for mounting flat or perpendicular to stud or flange.
- Mounting clips for quick attachment to metal studs.
- Sturdy design provides firm support of attached cable.




Fig. 1




Fig. 2



Fig. 3



Fig. 4




Fig. 5



Fig. 6




Fig. 7



Fig. 8

Conduit & Cable

### MC/AC Cable—Flexible Conduit

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CR2	1	Metal or wood stud and 1/8" flange	100
SSF-CR1	2	Supports 2 runs of MC/AC cable	100
SSF-CR4	3	Supports up to 4 runs of MC/AC cable	25
SSF-CR2-BCH	4	5/16" thru 1/2" flange	25
SSF-CR2-BCV	5	5/16" thru 1/2" flange	25
SSF-CR2-F1/2	6	1/8" thru 1/4" flange	25
SSF-CR2-F1/4	6	1/8" thru 1/4" flange	25
SSF-CR2-H1/2	7	1/16" thru 1/4" C purlin or vertical flange	25
SSF-CR2-H1/4	7	1/16" thru 1/4" C purlin or vertical flange	25
SSF-CR2-V1/4	8	1/16" thru 1/4" C purlin or vertical flange	25

# Steel City® Spring Steel Fasteners

## Conduit/Cable

### Features

- Clips available for 1, 2, or 4 cable runs.
- The standard CR2 part can be broken apart to create 2 single cable run clips.
- Mounting holes available for mounting flat or perpendicular to stud or flange.
- Mounting clips for quick attachment to metal studs.
- Sturdy design provides firm support of attached cable.




Fig. 9



Fig. 10



Fig. 11



Fig. 12



Fig. 13



Fig. 14



Fig. 15

### MC/AC Cable-Flexible Conduit

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CR2-Z2	9	Z purlin	25
SSF-CR2-UC	10	Through metal stud	25
SSF-CR1-CV	11	Acoustical tee	25
SSF-CR2-AB	12	Through metal stud	25
SSF-CR1-UC	13	Through metal stud	25
SSF-CR1-F1/2	14	5/16" through 1/2" flange	25
SSF-CR1-F1/4	14	1/8" through 1/4" flange	25
SSF-CR1-BCH	15	Through 1/2" flange	25

Conduit & Cable

# Steel City® Spring Steel Fasteners

## Conduit Supports

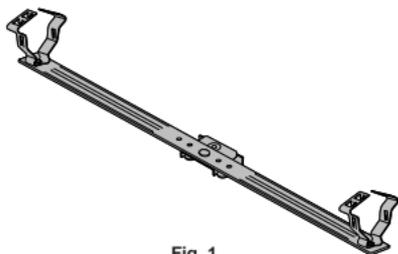


Fig. 1

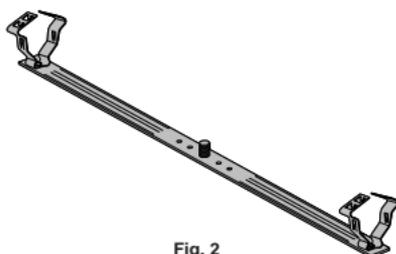


Fig. 2

### Support Box & Conduits From Single Drop Wires, Rods and Flanges

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CX18-C3/8H1/4	1	Support bar for conduit/box, MC/AC cable to 3/8" flex to 1/8" to 1/4" flange	25
SSF-CX18-C3/8H1/2	1	Support bar for conduit/box, MC/AC cable to 3/8" flex to 9/16" to 1/2" flange	25
SSF-CX18-C1/2 3/4-H1/4	1	Support bar for conduit/box, 1/2" & 3/4" conduit to 1/8" to 1/4" flange	25
SSF-CX18-C1/2 3/4-H1/2	1	Support bar for conduit/box, 1/2" & 3/4" conduit to 9/16" to 1/2" flange	25
SSF-CX18-C1-H1/4	1	Support bar for conduit/box, 1" conduit to 1/8" to 1/4" flange	25
SSF-CX18-C1-H1/2	1	Support bar for conduit/box 1" conduit to 9/16" to 1/2" flange	25
SSF-CX18-C3/8S	2	Support bar for conduit/box, MC/AC cable to 3/8" flex, 1/4"-20 x 9/16" stud in center hole	25
SSF-CX18-C1/2 3/4S	2	Support bar for conduit/box, 1/2" to 3/4" conduit, 1/4"-20 x 9/16" stud in center hole	25
SSF-CX18-C1S	2	Support bar for conduit/box, 1" conduit to 3/8" flex, 1/4"-20 x 9/16" stud in center hole	25

### Features

- Supports conduit on both sides of a junction box.
- Holes in opposite ends of 18" bar accommodate CC and CS series conduit clips.
- A center hole accepts BH flange clips and CVC utility clips fasteners for attachment to threaded rod.

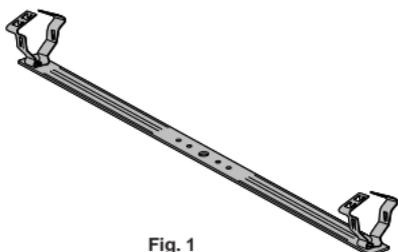



Fig. 1

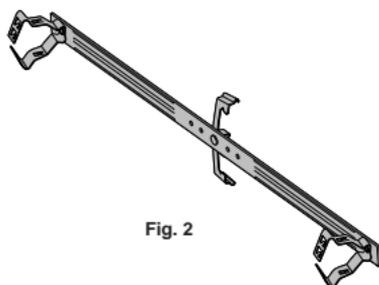



Fig. 2

### Support Box & Conduits From Single Drop Wires, Rods and Flanges

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CX18-C3/8	1	Support bar for conduit/box, MC/AC cable to 3/8" flex for screw or threaded rod mount	25
SSF-CX18-C1/2 3/4	1	Support bar for conduit/box, 1/2" to 3/4" conduit for screw or threaded rod mount	25
SSF-CX18-C1	1	Support bar for conduit/box, 1" conduit for screw or threaded rod mount	25
SSF-CX18-C3/8UC	2	Support bar for conduit/box, MC/AC cable to 3/8" flex from #12 wire thru 3/8" rod	25
SSF-CX18-C1/2 3/4UC	2	Support bar for conduit/box, 1/2" & 3/4" conduit from #12 wire thru 3/8" rod	25
SSF-CX18-C1UC	2	Support bar for conduit/box, 1" conduit from #12 wire thru 3/8" rod	25

# Steel City® Spring Steel Fasteners

## Conduit Supports

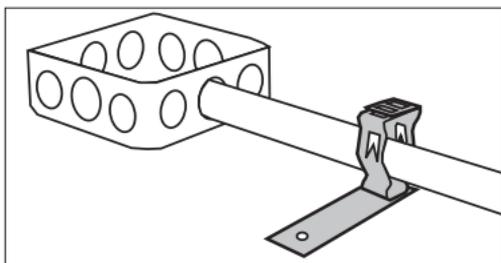

### Features

- Attach conduit to steel, concrete or wood.
- FB Series can be used to avoid offset bends when used with 1-1/2" deep boxes.
- OB Series can be used to avoid offset bends when used with 2-1/8" deep boxes.




Fig. 1




Fig. 2




Fig. 3

## Nailing Bracket

Catalog Number	Fig. No.	Description	Pkg. Per Box
SSF-CC1/2 3/4-FB	1	Nailing bracket riveted to conduit clip, 1/2" & 3/4" conduit	25
SSF-CS1/2-FB*	2	Nailing bracket riveted to snap-in conduit clip, 1/2" EMT & Rigid	25
SSF-CS3/4-FB*	2	Nailing bracket riveted to snap-in conduit clip, 3/4" EMT & Rigid	25
SSF-CS1/2-OB*	3	Offset nailing bracket - 1/2" conduit	25
SSF-CS3/4-OB*	3	Offset nailing bracket - 3/4" conduit	25
SSF-CS1-OB*	3	Offset nailing bracket - 1" conduit	25

Listed UL 2239

\* UL and cUL not applicable





# Steel City® Spring Steel Fasteners

## Cable Fasteners

### Features

- Secures MC/AC cable bundles and Telecom cable bundles.
- 11" cable tie included

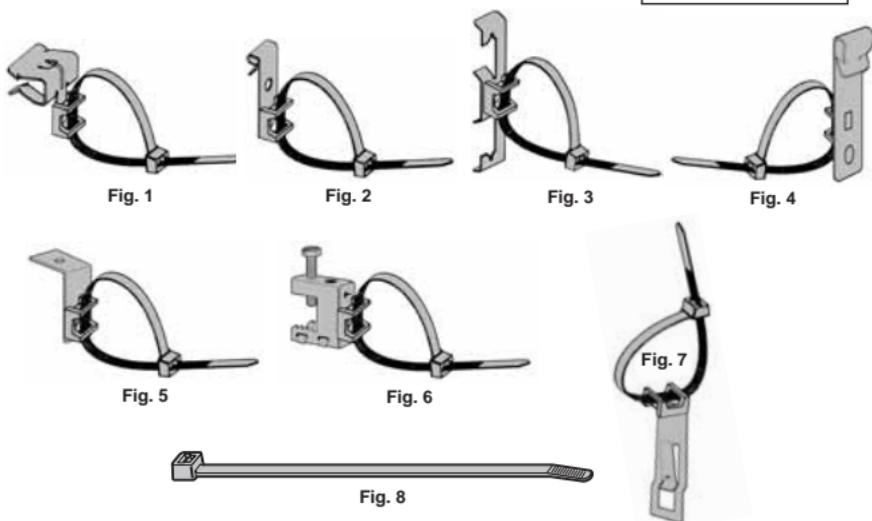

### Cable Fastener with Cable Tie

Catalog Number	Fig. No.	Description	Qty. Per Box
SSF-CT-F1/2	1	5/16" to 1/2" Flange	25
SSF-CT-F1/4	1	1/8" to 1/4" Flange	25
SSF-CT-V1/4	2	Through 1/4" flange	25
SSF-CT-UC	3	Utility clip	25
SSF-CT-A1/4	4	1/8" to 1/4" Vertical flange	25
SSF-CT-AB	5	Angle bracket	25
SSF-CT-BC	6	Through 1/2" flange	25
SSF-CT-CH	7	Acoustical tee	25
L11-120-9-C	8	11" Cable Tie	100

Conduit & Cable