


Stud Wall & Drywall

Cable Support



Features


- Supports up to 4 runs of MC and AC cable and up to 6 runs of nonmetallic sheathed cable
- Installs with nails or staple or sheet metal screws
- Complies with CEC article 12-516 for all wood and metal studs
- Made with high strength plastic



Metal Stud

Features

- Supports 1/2 in. and 3/4 in. EMT conduit and MC/AC cable
- Works with wood or metal stud
- Preset bend provides alignment with knockouts for 1-1/2 in. deep boxes or 2-1/8 in. deep boxes



Cat. No.	Fig. No.	Description	Qty. Per Box
Cable Support			
SSF-SC6	1	Nonmetallic sheathed MC/AC cable to stud clip	100

Cable Type	Cable Size	Max. Qty. Fastener
Cable Support		
Nonmetallic Sheathed Cable	14-2, 12-2, 10-2, 14-3 12-3 and 10-3 w/ground	6
Nonmetallic	8-2 and 6-2 w/ground	4
Metallic Clad (MC) Cable	14-2, 12-2, 10-2, 14-3 12-3, 10-3, 14-4, 12-4 and 10-4 w/ground	4
Armored Cable (AC)	14-4, 12-2, 10-2, 8-2 14-3, 12-3, 10-3, 14-4 12-4 and 10-4 w/ground	4
Flexible Conduit (BX)	5/16, 3/8	4

Cat. No.	Fig. No.	Description	Qty. Per Box
Screw On Conduit Support			
SSF-SS1/2 3/4	1	1/2 in. and 3/4 in. EMT conduit and MC/AC to metal or wood stud For 1-1/2 in. deep box	100
SSF-SS1/2 3/4D	1	1/2 in. and 3/4 in. EMT conduit, and MC/AC to metal or wood stud For 2-1/8 in. deep box	

Stud Wall & Drywall

Snap On Box Supports

Features

- Fits most electrical boxes requiring plaster rings
- Fits most metal stud sizes
- Will not move on stud
- Wider part for more secure fastening
- No screws required
- Support leg braces box against stud
- Installs easily with a hammer





Fig. 1




Fig. 2




Fig. 3




Fig. 4

Far Side Box Supports

Features

- Provides side support for electrical boxes
- Works with most electrical boxes for 2-1/2 in., 3-1/2 in. and 4 in. metal stud depths

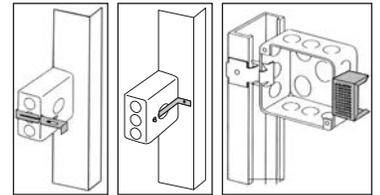


Fig. 1




Fig. 2



Fig. 3




Cat. No.	Fig. No.	Description	Qty. Per Box
Snap On Box Clip			
SSF-SMX	1	Snap on box support for mounting to stud	100
SSF-SK	2	Screw to stud, box support	
SSF-SK-C1/2 3/4	3	1/2 in. -3/4 in. finger close conduit clip	25
SSF-SK-C1	3	1 in. finger close conduit clip	
SSF-SK-S1/2	4	1/2 in. snap-in conduit clip	
SSF-SK-S3/4	4	3/4 in. snap-in conduit clip	
SSF-SK-S1	4	1 in. snap-in conduit clip	

Cat. No.	Fig. No.	Description	Qty. Per Box
Far Side Box Support			
SS1-TB	1	Far side box support	100
50-SC*	2	Box brace for 4 in. square or octagonal box	
SSF-SX	3	Electrical box support	

* CSA and UL not applicable

Stud Wall & Drywall

Metal Stud



Features

- Attaches securely to most metal stud sizes
- Adjustable offset allows the box to protrude through drywall sizes: 1/4 in., 3/8 in., 1/2 in., 5/8 in., or 3/4 in.
- Riveted to accommodate your drywall requirements




Fig. 1




Fig. 2




Fig. 3



Cat. No.	Fig. No.	Description	Qty. Per Box
Switch Box or Conduit to Metal Stud			
SSF-SFA	1	Snap on box support for mounting to stud, adjustable	25
SSF-SF0	2	Snap on box support for mounting to stud, riveted for flush to stud face	
SSF-SF1/4	2	Snap on box support for mounting to stud, riveted for 1/4 in. drywall	
SSF-SF3/8	2	Snap on box support for mounting to stud, riveted for 3/8 in. drywall	
SSF-SF1/2	2	Snap on box support for mounting to stud, riveted for 1/2 in. drywall	
SSF-SF5/8	2	Snap on box support for mounting to stud, riveted for 5/8 in. drywall	
SSF-SF3/4	2	Snap on box support for mounting to stud, riveted for 3/4 in. drywall	
SSF-SFT*	3	Snap on box support for mounting to stud with 1/4 in. -20 thread impression	

* CSA not applicable

Features

- Attaches securely to most metal stud sizes
- Adjustable offset allows the box to protrude through drywall sizes: 1/4 in., 3/8 in., 1/2 in., 5/8 in., or 3/4 in.
- Riveted to accommodate your drywall requirements





Fig. 4





Fig. 5

Cat. No.	Fig. No.	Description	Qty. Per Box
Switch Box or Conduit to Metal Stud			
SSF-SF-S1/2	4	Snap on stud, push-in conduit clip, 1/2 in. conduit	25
SSF-SF-S3/4	4	Snap on stud, push-in conduit clip, 3/4 in. conduit	
SSF-SF-S1	4	Snap on stud, push-in conduit clip, 1 in. conduit	
SSF-SF-C3/8	5	Snap on stud, conduit support clip, 3/8 in. conduit or MC/AC cable	
SSF-SF-C1/2 3/4	5	Snap on stud, conduit support clip, 1/2 in. - 3/4 in. conduit	
SSF-SF-C1	5	Snap on stud, conduit support clip, 1 in. conduit	

Stud Wall & Drywall

Metal Stud



Features

- Attaches 4 in. and 4-11/16 in. electrical boxes to metal stud
- Support leg can be attached to stud to eliminate movement of box in wall
- Attaches to metal or wood stud using self tapping screws and screw gun or nails.
- One part mounts boxes for 1-1/2 in., 2-1/2 in., 3-1/2 in., 4 in. and 6 in. stud which means less inventory
- SH4, SH6, brackets available specifically for 4 in. and 6 in. studs respectively




Fig. 1



Fig. 2



Cat. No.	Fig. No.	Description	Qty. Per Box
Mounting Bracket			
SSF-SH2346	1	4 in. & 4-11/16 in. outlet boxes to 2-1/2 in., 3-1/2 in., 4 in. & 6 in. metal studs	100
SSF-SH4	2	4 in. & 4-11/16 in. outlet boxes to 4 in. metal studs	50
SSF-SH6	2	4 in. & 4-11/16 in. outlet boxes to 6 in. metal studs	

Features

- Self tapping screws are aligned with the dimples so that the box is straight
- Allows mounting of multiple boxes
- Preset for metal stud 16 in. or 24 in. on center
- Depth set for 1-1/2 in. or 2-1/8 in. deep electrical box
- Installs easily with a screw gun
- SGP and SGA brackets have adjustable tabs for 1-1/2 in. or 2-1/8 in. deep boxes
- SGA brackets adjustable for non-standard stud spacing

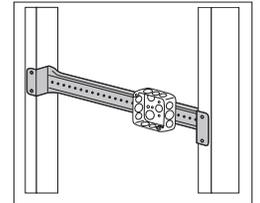



Fig. 3



Cat. No.	Fig. No.	Description	Stud Spacing	Box Depth	Qty. Per Box
Screw Gun Box Bracket					
SSF-SG16A	3	Adjustable box bracket	11 in. -18 in.	1-1/2 in. or 2-1/8 in.	50
SSF-SG24A	3	Adjustable box bracket	17 in. -26 in.	1-1/2 in. or 2-1/8 in.	

Stud Wall & Drywall

Box Brackets



Features

- Supports electrical boxes, plaster rings or low voltage devices from one bracket
- Accommodates 4 in. or 4-11/16 in. boxes
- Bendable leg serves as a bracket stabilizer
- SB16F and SB24F flat versions allow mounting for any stud spacing, from 4 in. to 24 in.
- SB brackets allow box mounting in all four 90° orientations




Fig. 1




Fig. 2




Fig. 3




Fig. 4



Cat. No.	Fig. No.	Description	Qty. Per Box
Box Mounting Brackets for Between Studs			
SSF-SB16	1	Box mounting bracket for between studs, 16 in. stud spacing	25
SSF-SB24	2	Box mounting bracket for between studs, 24 in. stud spacing	
SSF-SB16F	3	Box mounting bracket, flat version, up to 16 in. stud spacing	
SSF-SB24F	4	Box mounting bracket, flat version, up to 24 in. stud spacing	

Features

- Improved bracket with bendable stabilizer leg for use on 2-1/2 in. and 3-1/2 in. metal studs
- Mounts outlet boxes 12 in. or 18 in. offset from either a metal stud track or a stud
- When mounted, drywall ring is brought to within 1/6 in. of drywall every time and will not bulge or break out drywall
- Mounts 4 in. or 4-11/16 in. outlet boxes, 1-1/2 in. or 2-1/8 in. deep
- The SSF-S6X extender works with SSF-SV12, SSF-SV18, SSF-SB16 and SSF-SB24 to extend stabilizer leg when using 6 in. stud




Fig. 1





Fig. 2



Cat. No.	Fig. No.	Description	Qty. Per Box
Extension Plate Bracket			
SSF-SV12	1	Extension plate bracket, 12 in. height	50
SSF-SV18	1	Extension plate bracket, 18 in. height	
SSF-S6X	2	Extender for 6 in. metal studs	100

Stud Wall & Drywall

Switch Box Bracket



Features

- Fits 2 in. x 3 in. switch boxes with one or two screw plaster ears
- Uses one bracket on 2-1/2 in. and 3-1/2 in. metal studs
- Bracket can be piggy-backed on same side of metal stud (singly or any number in series) giving greater flexibility to installer
- Brackets can be mounted on both sides of metal stud for double mounting
- Will not bulge or break out the drywall when mounted





Fig. 1



Cat. No.	Fig. No.	Description	Qty. Per Box
Switch Box Bracket			
SSF-SHSB	1	Switch box bracket	100

Box Support



Features

- Mounts on metal or wood studding
- Used as conduit rack or space for rigid conduit, IMC or EMT
- Ideal for schools, hospitals, industrial and commercial jobs
- Galvanized steel




Fig. 1

Cat. No.	Fig. No.	Description	Qty. Per Box
Floor Mounted Box Supports			
7502	1	Footed box supports, 20 in. height	25
7503 SC	1	Footed box supports, 30 in. height	50

Stud Wall & Drywall

Metal Stud



Features

- Fit any size or shape metal stud hole
- Provides complete 360° protection for cable



Fig. 1




Fig. 2




Fig. 3

Drywall

Features

- A quick means of support for horizontal runs of conduits or MC/AC through metal stud
- Installs easily with a screw gun
- SSF-SPI allows ENT conduit and MC/AC cable to be easily pulled through metal stud




Fig. 1



Fig. 2




Fig. 3



Cat. No.	Fig. No.	Description	Qty. Per Box
Easy Snap Grommet			
1300*	1	Plastic bushing for metal stud 1 in. trade size opening (1-11/32 in.)	100
1216-EN*	2	Twist-on universal bushing for metal stud	50
CI158SSPB	3	For 1-5/8 in. metal stud. Installed inside the steel stud replacing 2 CI66-SS	250

* CSA not applicable




Cat. No.	Fig. No.	Description	Qty. Per Box
Through Stud Cable/Conduit Support			
SSF-SAB-C1/2 3/4	1	1/2 in. or 3/4 in. finger close conduit clip	25
SSF-SAB-C3/8**	1	Finger close conduit clip 14-2 thru 12-3 MC/AC cable and 3/8 in. conduits	
SSF-SAB-S1/2*	2	Snap-in conduit clip — 1/2 in. conduit	
SSF-SAB-S3/4*	2	Snap-in conduit clip — 3/4 in. conduit	
SSF-SPI*	3	Supports up to 1 in. conduit	100

* UL and CSA not applicable

** CSA not applicable

Stud Wall & Drywall

Drywall



Features

- Eliminates the need for an electrical box when installing low voltage Class 2 wiring
- For old work or new work




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5



Cat. No.	Fig. No.	Description	Qty. Per Box
Low Voltage Mounting Brackets — Screw on Support			
SSF-SLV*	1	Old work or new work low voltage bracket	100
VN1*	2	Nonmetallic single gang new work low voltage bracket	50
VN2*	—	Nonmetallic two gang new work low voltage bracket	50
VW1*	3	Nonmetallic single gang old work low voltage bracket	50
VW2*	—	Nonmetallic two gang old work low voltage bracket	50
WBF-1*	4	Low voltage mounting bracket with screws	100
CIMB-1	5	Mounting bracket. Raised 1/2 in.	25

* CSA not applicable

Features

- Quickly attaches box through finished drywall
- For up to 1-1/2 in. thick drywall
- New CI820D shipped in one piece break-apart design
- Easy to install





Fig. 1

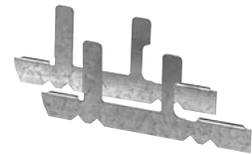



Fig. 2



Cat. No.	Fig. No.	Description	Qty. Per Box
Old Work Box Support			
CI820D	2	Re-work switch box steel mounting holder for 1/2 in. dry-wall	200 sets

Stud Wall & Drywall

Drywall



Features

- Use for oversized drywall openings
- Prevents broken cover plates
- Stops device from being pushed back in wall
- Makes floating device rigid




Fig. 1

Protector Plates

Features

- Protects cable(s) from damage when installing drywall or paneling
- No nails or screws required
- Fits all stud sizes
- Both products meet requirements for CEC Rule 12-516 and 12-616
- Cl66SS legs are crimped with pliers to stud to provide secure fit





Fig. 1



Fig. 2



Cat. No.	Fig. No.	Description	Qty. Per Box
Device Leveler and Retainer			
SSF-SR	1	Single gang device leveler and retainer	100

Cat. No.	Fig. No.	Description	Qty. Per Box
Protector Plates			
Cl66SS	1	Protector plate for metal stud	250
Cl66	2	Protector plate for wood stud	