


## Aluminum Straight and 90° Grip-Seals®

- UL Listed
- CSA
- RoHS Compliant
- Suitable for Use in Hazardous Locations per Class I, Div. 2, Class II, Div. 1 & 2, and Class III, Div. 1 & 2
- Liquid Tight Seal
- Straight and 90° Configurations

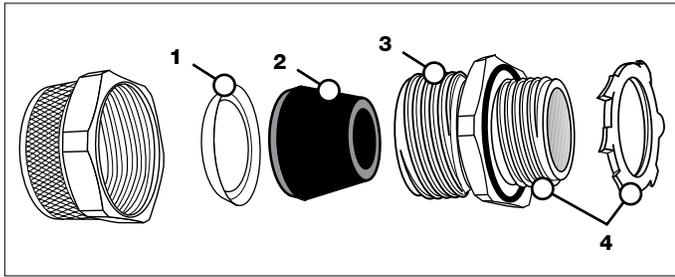

Each Grip-Seal® package includes the grip-seal body, O-ring and locking nut. Our aluminum compression bushing and threaded body is resistant to corrosion and weathering, and has a maximum operating temperature of 250°F. The nickel-plated friction ring provides a uniform compression for a proper environmental seal against dust, moisture and chemicals.

### FEATURES & BENEFITS

- 1. NICKEL-PLATED FRICTION RING** — Provides uniform compression for a proper seal. Prevents bushing damage and results in a tight, uniform seal on the cord surface.
- 2. MULTIPLE SEALING BUSHINGS** — Provides environmental seal against dust, moisture, chemicals. One part number covers a variety of cord diameters. 250°F maximum operating temperature.
- 3. ALUMINUM COMPRESSION BUSHING AND THREADED BODY** — Resistant to corrosion and weathering. Easy attachment to pendants and electrical enclosures. Available in both a 90° and straight configuration.
- 4. SEALING O-RING** — Seals out oil, chemicals and other contaminants. Locknut included with each unit.

### ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.	CONFIGURATION	FITTING SIZE	CORD O.D. RANGE (IN)	NUMBER OF BUSHINGS
55001	Straight	3/8" NPT	0.188 – 0.312	2
55002	Straight	3/8" NPT	0.312 – 0.438	2
55003	Straight	1/2" NPT	0.250 – 0.375	2
55004	Straight	1/2" NPT	0.375 – 0.500	2
55005	Straight	1/2" NPT	0.500 – 0.625	2
550061	Straight	3/4" NPT	0.188 – 0.250	1
55006	Straight	3/4" NPT	0.500 – 0.688	2
55007	Straight	3/4" NPT	0.625 – 0.812	2
55008	Straight	1" NPT	0.688 – 0.875	2
55009	Straight	1" NPT	0.812 – 1.000	2
55010	Straight	1-1/4" NPT	0.875 – 1.125	2
55011	Straight	1-1/4" NPT	1.125 – 1.375	2
55012	Straight	1-1/2" NPT	0.875 – 1.125	2
55013	Straight	1-1/2" NPT	1.125 – 1.375	2
55014	Straight	2" NPT	1.250 – 1.562	2
55015	Straight	2" NPT	1.562 – 1.812	2
55016	Straight	2-1/2" NPT	1.812 – 2.062	2
55017	Straight	2-1/2" NPT	2.062 – 2.312	2
55020	Straight	3" NPT	2.437 – 2.812	2
55901	90°	3/8" NPT	0.188 – 0.312	2
55902	90°	3/8" NPT	0.312 – 0.438	2
55903	90°	1/2" NPT	0.250 – 0.375	2
55904	90°	1/2" NPT	0.375 – 0.500	2
55905	90°	1/2" NPT	0.500 – 0.625	2
55906	90°	3/4" NPT	0.500 – 0.688	2
55907	90°	3/4" NPT	0.625 – 0.812	2
55908	90°	1" NPT	0.688 – 0.875	2
55909	90°	1" NPT	0.812 – 1.00	2
55910	90°	1-1/4" NPT	0.875 – 1.125	2
55911	90°	1-1/4" NPT	1.125 – 1.375	2
55914	90°	1 1/2" NPT	1.125 – 1.250	1
55912	90°	2" NPT	1.250 – 1.562	2
55913	90°	2" NPT	1.562 – 1.812	2