


Kord-Gard® Mesh Cord Grips

- UL Listed
- CSA
- RoHS Compliant
- Suitable for Use in Hazardous Locations per Class I, Div. 2, Class II, Div. 1 & 2, and Class III, Div. 1 & 2
- Extra Hard-Duty Strain Relief
- Straight & 90° Configurations

Each Grip-Seal® package includes the grip-seal body, O-ring and locking nut. Our aluminum compression bushing and threaded body is resistant to corrosion and weathering, and has a maximum operating temperature of 250°F. The nickel-plated friction ring provides a uniform compression for a proper environmental seal against dust, moisture and chemicals. The full double-woven stainless steel mesh is a unique drop-in basket design for easier assembly and provides exceptional gripping, strength, a longer cord life and resists corrosion.

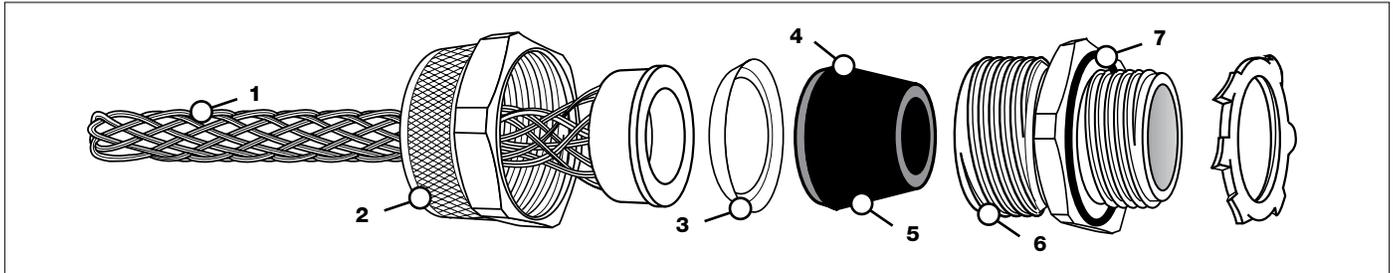

FEATURES & BENEFITS


- 1. FULL DOUBLE-WOVEN STAINLESS STEEL MESH** — Provides exceptional gripping strength, longer life. Resists corrosion.
- 2. UNIQUE DROP-IN BASKET DESIGN** — Easier assembly.
- 3. NICKEL-PLATED FRICTION RING** — Provides uniform compression for a proper seal. Prevents bushing damage.
- 4. SYNTHETIC SEALING BUSHING** — Seals out water, oil, and other contaminants. 250°F maximum operating temperature.
- 5. MULTIPLE BUSHING SIZES** — Covers a broad range of cord and cable sizes.
- 6. ALUMINUM COMPRESSION BUSHING AND THREADED BODY** — Resistant to corrosion and weathering. Easy attachment to pendants and electrical enclosures. Available in both a 90° and straight configuration.
- 7. SEALING O-RING AND LOCKNUT** — Seals out oil, chemicals and other contaminants. Locknut included with each unit.

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.		CORD O.D. RANGE (IN)	FITTING SIZE	NUMBER OF BUSHINGS	KNOCK-OUT DRILL SIZE
STRAIGHT	90°				
55405	59405	0.124 – 0.312	3/8" NPT	3	11/16"
55410	59410	0.250 – 0.438	3/8" NPT	3	11/16"
55415	59415	0.312 – 0.500	1/2" NPT	3	7/8"
55420	59420	0.437 – 0.625	1/2" NPT	3	7/8"
55430	59430	0.562 – 0.750	3/4" NPT	2	1-1/8"
55440	59440	0.687 – 0.875	3/4" NPT	1	1-1/8"
55445	59445	0.745 – 1.000	1" NPT	2	1-3/8"
55450	59450	0.870 – 1.125	1-1/4" NPT	2	1-3/4"
55455	59455	1.105 – 1.375	1-1/4" NPT	2	1-3/4"
55460	59460	1.320 – 1.562	2" NPT	2	2-3/8"
55465	59465	1.413 – 1.655	2" NPT	2	2-3/8"
55470	—	1.68 – 1.81	2" NPT	1	2-3/8"
55471	—	1.81 – 2.06	2" NPT	1	2-3/8"
55474	—	2.06 – 2.43	2-1/2" NPT	3	2-7/8"
55437	—	2.188 – 2.312	3" NPT	1	3-1/2"

Kord-Gard® Mesh Cord Grips *(Continued)*

SPECIFICATIONS

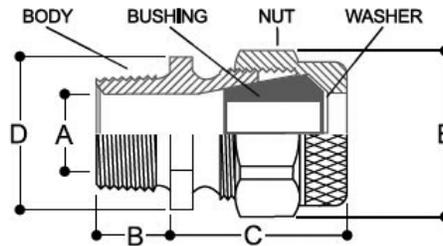

STRAIGHT KORD-GARD® DIMENSION TABLE

PART NO.	FITTING SIZE	A: BODY BORE (IN)	B (IN)	C (IN)	D: BODY HEX. (IN)	E: NUT DIA. (IN)
55405 / 55410	3/8" NPT	0.47	0.44	0.96	0.88	0.96
55415 / 55420	1/2" NPT	0.62	0.54	1.40	1.25	1.53
55430	3/4" NPT	0.80	0.57	1.42	1.25	1.53
55440	3/4" NPT	0.81	0.57	1.49	1.37	1.72
55445	1" NPT	1.06	0.69	1.91	2.00	2.47
55450 / 55455	1-1/4" NPT	1.32	0.69	1.80	2.00	2.00
55460 / 55465	2" NPT	2.00	0.80	2.39	2.83	2.97
55437 / 5470	2" NPT	1.90	0.80	3.32	4.00	4.20
55471 / 55474	2" NPT	1.90	0.80	3.32	4.00	4.20

90° KORD-GARD® DIMENSION TABLE

PART NO.	FITTING SIZE	A: BODY BORE (IN)	B (IN)	C (IN)	D (IN)	E: BODY HEX. (IN)	F: NUT DIA. (IN)	G (IN)
59405 / 59410	3/8" NPT	0.45	0.44	1.51	2.00	0.98	0.99	1.31
59415 / 59420	1/2" NPT	0.58	0.56	1.88	2.39	1.03	1.33	1.50
59430 / 59440	3/4" NPT	0.76	0.63	2.25	2.88	1.25	1.52	1.94
59445	1" NPT	0.99	0.63	2.41	3.13	1.44	1.70	2.00
59450 / 59455	1-1/4" NPT	1.28	0.69	3.19	4.41	2.13	2.55	2.69
59460 / 59465	2" NPT	1.90	0.81	4.03	5.56	2.81	3.25	3.19