

ITEM NO.	CATALOG NO.	INSULATION COLOR	WIRE SIZE	NEMA Tab Size	LENGTH (L)	WIDTH (W)	WIRE STRIP LENGTH	FIG. NO.
30009065	QN10M25X03D	YELLOW	10 - 12 AWG	.250 X .032	.95 [24]	.250 [6]	3/8"	1
10001528	QN14M25X03D	BLUE	14 - 16 AWG	.250 X .032	.87 [22]	.250 [6]	3/8"	1
10001524	QN14M18X02D	BLUE	14 - 16 AWG	.187 X .020	.8 [20]	.187 [5]	3/8"	2
10001511	QN18M25X03D	RED	16 - 22 AWG	.250 X .032	.87 [22]	.250 [6]	3/8"	1
10001507	QN18M18X02D	RED	16 - 22 AWG	.187 X .020	.8 [20]	.187 [5]	3/8"	2

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
D	02/15/2013	CHANGE WIRE RANGE FROM 18 - 22AWG TO 16 - 22AWG	30440	PM	MB

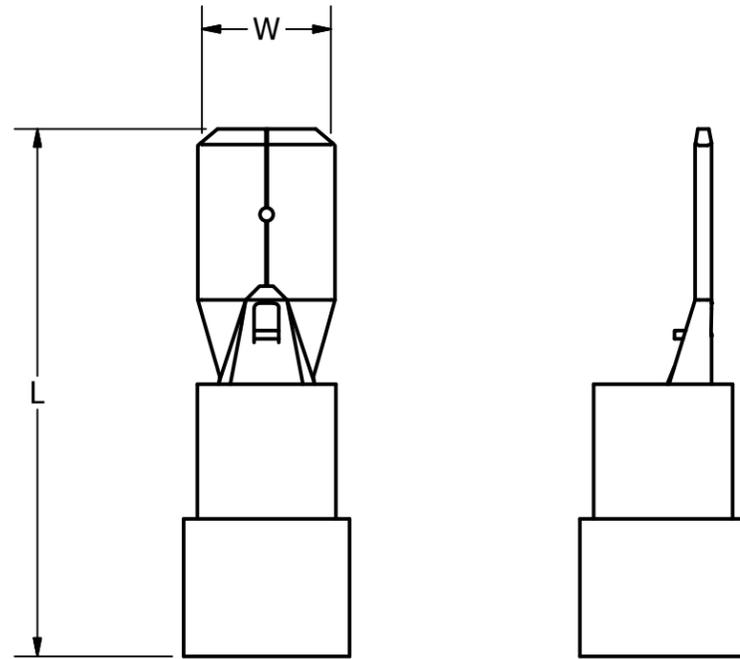


FIG. 1

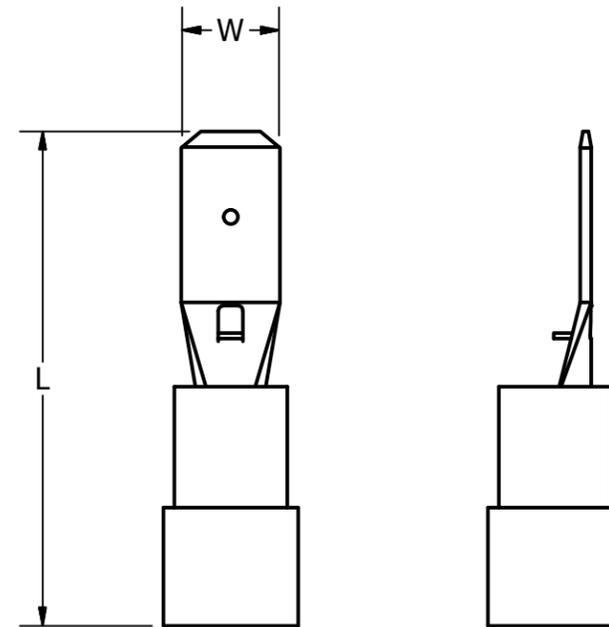


FIG. 2

NOTES:

- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS, ROUNDED OFF TO THE NEAREST MILLIMETER AND ARE FOR REFERENCE ONLY, UNLESS OTHERWISE SPECIFIED.
- SUFFIX "D" DENOTES DISTRIBUTOR PACKAGING. REPLACE SUFFIX "D" WITH "B" FOR BULK PACKAGING.
- INSTALLATION TOOLING: MRE1022NV, Y10D, T1022.

TO ORDER BURNDY® PRODUCTS CALL		NYLON INSULATED DISCONNECTS	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: SEE TABLE	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		CAT. NO: QN--M-- (SEE TABLE)	
FOR PRODUCT INFO: http://www.burndy.com		DRAWN BY: E.MARTIN 01/25/2012	
		CHECKER: --	
		DSN APRVL: E.MARTIN 05/01/2012	
		MFG APRVL: --	
		QA APRVL: K.CHERYL 05/01/2012	
		MKT APRVL: G.STEWART 05/01/2012	
		PROD FAM: CM&R	
		DRAWING NO	
		PROJECT #: --	
		SIZE	
		50000757	
		DOCUMENT TYPE: SALES	
		REL LEVEL: Released	
		B	
		SHEET 1 OF 1	
		REV	
		D	